



Midea Ducted & Ductless Systems

MIDEA28 SERIE
SINGLE & MULTI-ZONE SYSTEMS



Exclusive distributor in Quebec



Icons Guide

- 

ECO
Midea's new energy-saving AC apply innovative ECO Mode. By pressing this button, AC will run into a 8-hour saving mode which cuts 60% energy off against normal mode.
- 

Sleep Mode
The function enables the air conditioner to automatically increase cooling or decrease heating 1°C per hour for the first 2 hours, then holds steady for the next 5 hours, after that it will switch off. This function maintains both energy saving and comfort at night.
- 

Follow Me
Temperature sensor built in the remote controller will sense its surrounding temperature so the unit can adjust room temperature more accurately to give you comfort.
- 

Turbo
This function gives you a boost in cooling and heating power for a period and makes the room cool down or heat up rapidly.
- 

Silent
Indoor fan will run at super breeze speed and indoor noise level can be extremely low when the unit enters silent mode operation.
- 

1%-100% Indoor Fan Speeds
1%-100% indoor fan speeds ensure more accurate control and bring more comfortable air flow.
- 

Anti-cold Air Function
Indoor fan speed is regulated automatically from the lowest grade to the setting grade according to evaporator temperature when the unit just starts heating operation. This function can prevent cold air blowing out to avoid discomfort to the users.
- 

8°C Heating
In heating operation, the preset temperature of the air conditioner can be as low as 8°C, which keeps the room temperature steady at 8°C and prevents the house from freezing when it is unoccupied for a long time in severe cold weather.
- 

360° Airflow Panel
360° air outlet creates a soft and gentle air flow which circulates throughout the whole space and provides an even temperature distribution in the room.
- 

iClean
The unit will collect condensate water to get frosting and then raise the temperature up to 56°C to deeply purify the evaporate and remove dust.
- 

Digital Display
If you want to turn on or off the LED display of the indoor unit, simply press the LED button on your remote control.
- 

Build-in Drain Pump
The drain pump can lift the condensing water up to 29.5 inches.
- 

Wired Control
Compared with infrared remote controller, wired controller can be fixed on the wall and avoid mislaying. It's mainly used for commercial zone and makes air conditioner control more convenient.
- 

Wi-Fi Control
With the Wi-Fi control, you can easily turn off or turn on the AC outside your house via smart device.
- 

Auto Restart Function
If the air conditioner turns off unexpectedly due to a power cut, it will restart with the previous setting mode automatically when the power resumes.
- 

2-way Draining
Both left and right sides of the indoor unit are available for drainage hose connection, for an easy installation.
- 

Timer
Set the unit to start and stop automatically in a 24h period.

What Is A Multi-Zone System?

A multi-zone system connects only one outdoor unit to multiple indoor units, so it's capable of cooling or heating multiple indoor rooms. Each indoor unit can also be individually controlled, scheduled and set to the desired room temperature.

Advantages of Multi-Zone Systems




WIDE SELECTION OF INDOOR UNITS

Provide a wide selection of indoor unit capacities and styles to suit a variety of room sizes and designs.



SPACE SAVING AND LOW NOISE

Connect several indoor units to a single outdoor units, reduce installation space and outdoor noise.

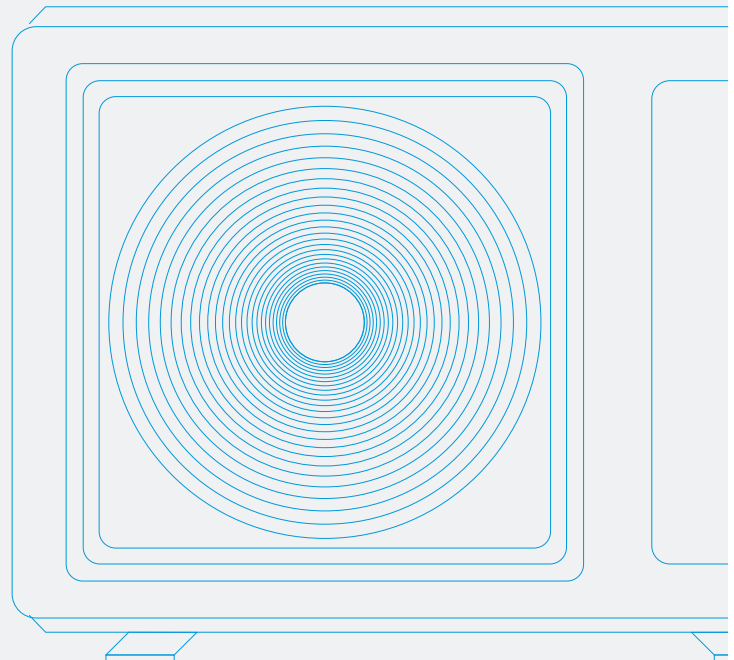

DUCTED & DUCTLESS

Add ductless units to the existing ducted system.



LOWER SYSTEM ELECTRIC POWER


When ECO mode is activated, the AC will run into a 8-hour saving mode which cuts 60% energy off against normal mode.



INDIVIDUAL CONTROL

Provide individual control for each indoor unit. Bring desired comfort and save energy as you can heat or cool only occupied rooms and not the entire house.

Ducted & Ductless Compatible System

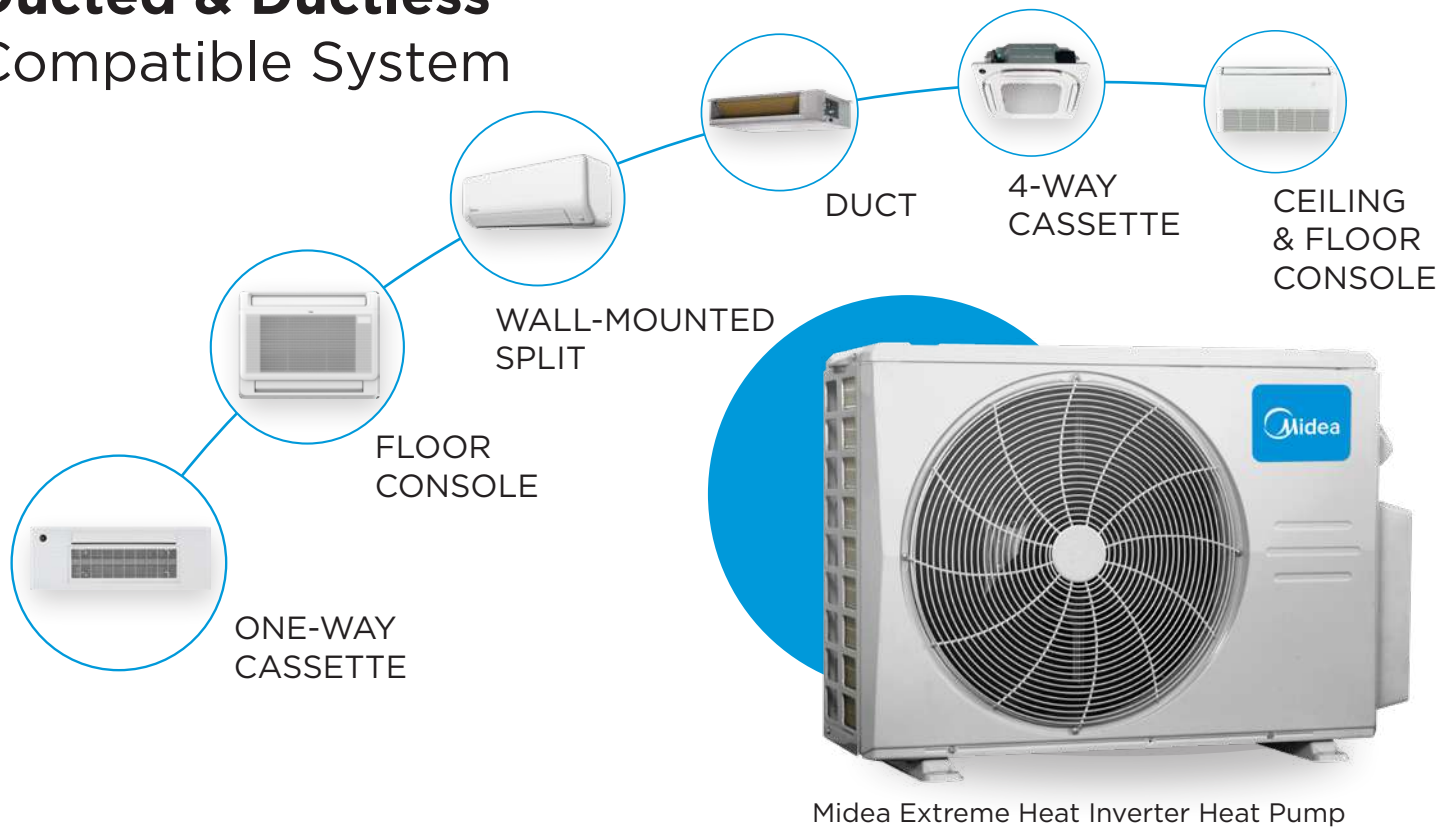


High Efficiency & Improved Comfort

Inverter

With innovative Midea's GA inverter technology, the multi-zone system can adjust the capacity output as the temperature changes by controlling the operation of compressor and fan motors.


When not all rooms require air conditioning or when ambient temperature changes, it runs with partial load and lower energy consumption detecting.

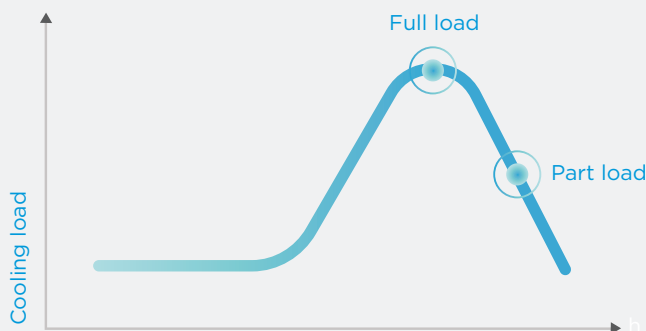

Enhance Room Comfort to Next Level

With Midea's GA Inverter Technology

GA Inverter Algorithm can analyze more factors including temperature difference and the tendency of temperature changes, by detecting temperature frequently to guarantee a more accurate control of the system output and bring better comfort.

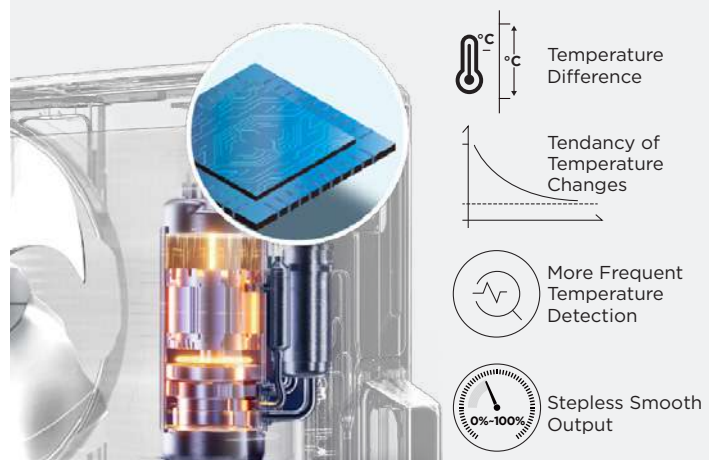

More **Efficiency**

Sustainable Lifestyle




Zoning Operation

Multi-zone applications are a more sustainable way to heat and cool by customizing comfort for each room. Homeowners can precisely heat and cool only the areas needed and turn off the unit when the area is unoccupied.

True **Comfort** for Every Space

Homeowners can set temperatures and modes individually to customize comfort in multiple spaces. Using different operating conditions or modes based on typical usage of different rooms like a living room, bedroom or an office helps save energy and optimize comfort.

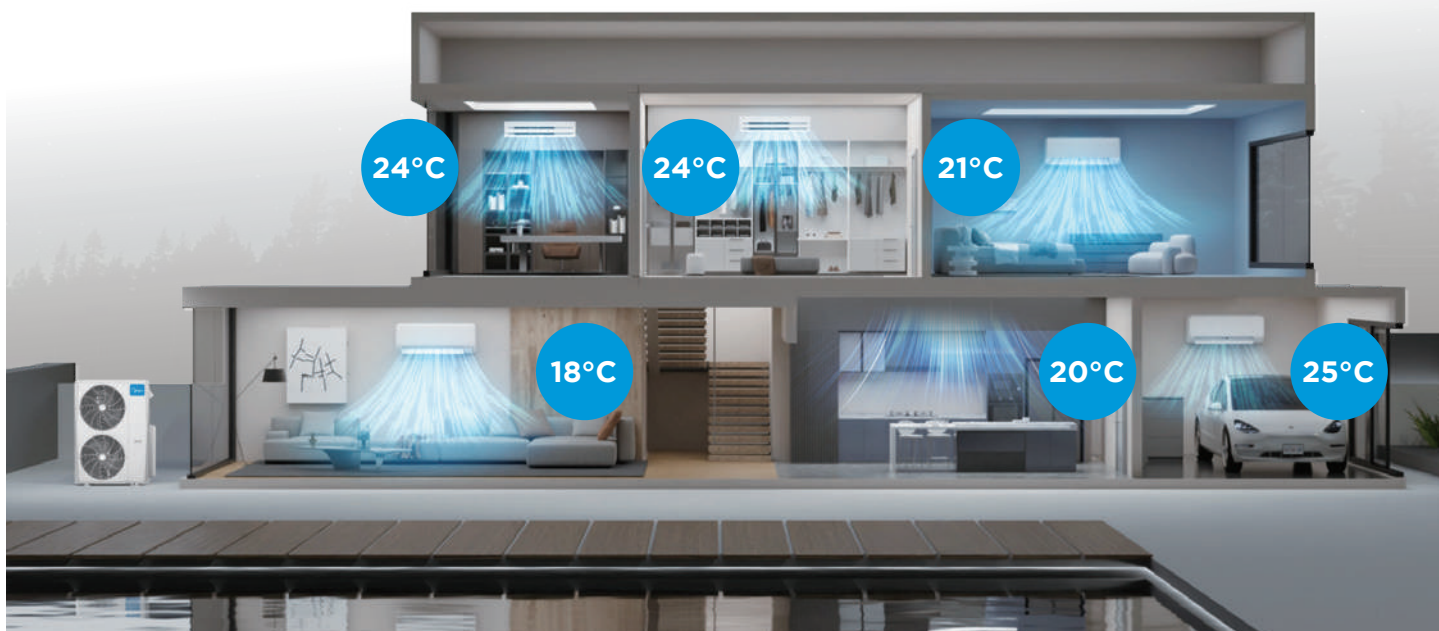


More Flexibility


Power up to **6 zones**

One more connection port is added to the multi-zone outdoor unit of all capacities

Flexible Combinations



Connection to only 1 indoor unit

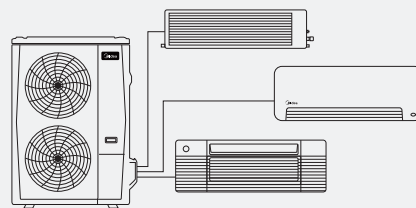

Connection up to 6 indoor units

Capacity	18K BTU	27K BTU	36K BTU	48K BTU
Port	3 ports available	4 ports available	5 ports available	6 ports available
Zone	1 to 3 zones	1 to 4 zones	1 to 5 zones	1 to 6 zones

One System, **the Best of Both Worlds**



Ductless

For the most convenient installation and flexible home comfort management, we offer various types of ductless indoor units tailored to meet the unique comfort needs of different rooms.

Wide Variety of Indoor Units for Residential Applications

A comprehensive indoor lineup of 6 types and 33 models with tailored designs for different spaces and functions, this product line has flexibility to combine ductless and ducted indoor units or incorporate an a-coil to the system.

Ductless Units



Ducted Units



Easy Future Upgrade & Service




OTA

Remotely upgrade your systems for the latest software update (optional).


Easy Wiring

With SynchroConnect technology, Midea multi-zone systems can self-diagnose the connection status after the installer connects the wires and line sets to check whether they're right or wrong.


What's more amazing is, with proper wiring between indoor units and the outdoor unit, the system can automatically synchronize the refrigerant lines to the wires, even when the lines are connected to the wrong ports, and vice versa. That means when dealing with line sets and wires, Midea installers can focus on correctly connecting the refrigerant lines or the wires and it will automatically match with the activation of SynchroConnect technology.

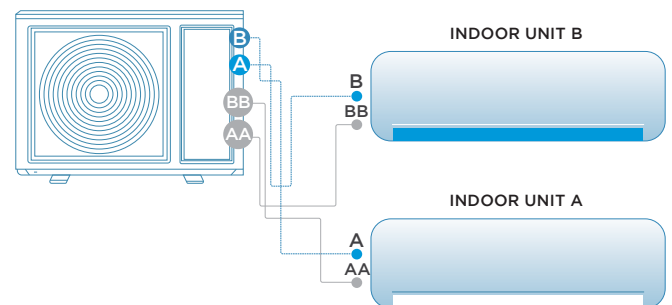

BEFORE

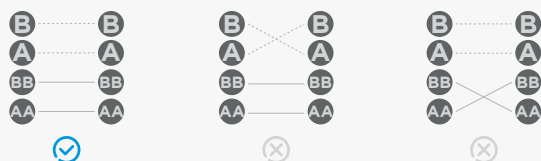

NOW

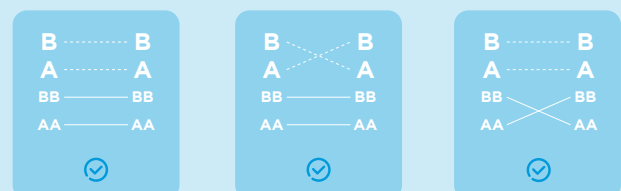



INVERTER HEAT PUMP

1.5-4

Tons Available

UP TO -30°C

Extreme Heat

UP TO 25

SEER2



Features



Refrigerant Leakage Detect

Indoor unit will show error code -ec- and stops automatically when refrigerant leakage is detected. This function can better protect the compressor being damaged by high temperature due to refrigerant leakage.



Self-diagnosis and Auto-protection

Once abnormal operation or parts failure happen, the unit will shut off automatically to protect the system. Meanwhile it will indicate protection or error code for fast service.



Emergency Using

When temperature sensor error happens, the air conditioner will display error code and stop immediately, while Midea AC will display error and continue running in a proper status, to avoid the case that AC is in urgent need.



Low Ambient Cooling

With built-in low ambient kit or special designed PCB, outdoor fan speed can be changed automatically according to condensation temperature. The air conditioner can run cooling operation even when the outdoor ambient temperature down to -15°C.



Fire-proof Electric Box

Electrical control box adopts new design, which can meet higher fire safety requirement to prevent internal fire due to electric spark accident.



Chassis Heating Belt

Heating belt is fitted on the base plate of outdoor unit to prevent accumulated defrosted water, which improves heat transfer efficiency.



Compressor Heating Belt

Heating belt is fitted on the compressor of outdoor unit to prevent accumulated defrosted water, which improves heat transfer efficiency.



Auto Defrosting

Prevents the indoor unit from freezing and maintains dehumidifying effect under low temperature environment.

MIDEA 28 WALL-MOUNTED SPLIT

Optimized Unit Structure
ECO Mode
Intelligent Comfort
Easy to Maintain
Longer Airflow Distance & Faster Cooling

Gear Function
Flexible Installation
Intelligent Sensor
Humidity Sensor

Intelligent Sensor

Wind follows me, wind avoids me, it's your choice. When you are away for over 30 minutes, the air conditioner will automatically lower the operating frequency to save energy.



Top-placed Air Filter

The air filter is placed on top of the unit and secured with magnetic attachment. Cleaning the air filter gets easy on an every day basis.



Features



Detachable Wind Wheel

The wind wheel can be taken out from the unit for thorough cleaning. You can also easily access and clean the inner part of the unit.




HIGH & LOW STATIC SLIM DUCT

Flexible Air Intake Ways
Optional Accessories
Built-In Drain Pump

Up to 0.8" Static Pressure
Computational Constant Airflow
Two-Way Installation

Computational constant Airflow Technology

Ensures constant airflow within 0.8" static pressure.

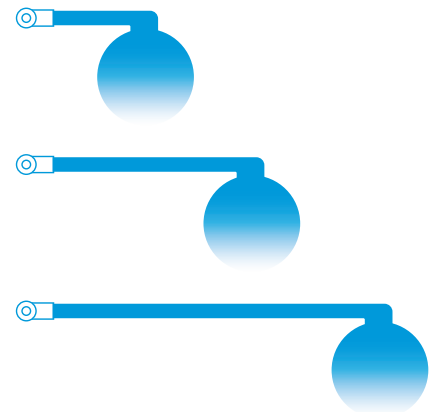

Features



Anti-cold
Air Function



2-way
Draining



Wired
Control



Follow Me



Build-In
Drain Pump



Auto Restart
Function



Timer



TU1 Copper



A2L Disperse
System



24V
Interface
(optional)


ONE-WAY CASSETTE



Side view



Top view

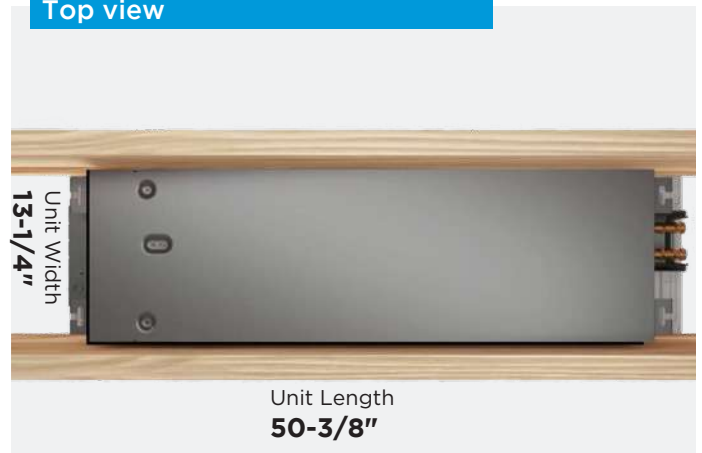

* For construction with floor joist and/or roof trusses spacing 16 in. c/c or greater.

Features

- | | | | | | | | | | |
|---|---|---|---|--|---|--|--|---|---|
| 
ECO | 
Turbo | 
Sleep Mode | 
Timer | 
Follow Me | 
i-Clean | 
8°C Heating | 
LED | 
TU1 Copper | 
Build-In Drain Pump |
| 
1%-100% Fan Speed Setting | 
Breeze Away | 
Child Lock | 
°C and °F Change | 
Silent Mode | 
Horizontal Swing | 
Gear | 
A2L Disperse System | 
24V Interface (optional) | 
Wired Control (optional) |
| 
Wi-Fi Control (optional) | 
OTA (optional) | | | | | | | | |



4-WAY CASSETTE

Built-in Drain Pump
E-box Inside
Humidity Sensor
Wired Controller *(optional)*

Features



Sleep Mode



Anti-cold
Air Function



Wild-angle
Airflow



Independent
Deshumidification



Build-In
Drain Pump



Auto Restart
Function



Timer



TU1 Copper



A2L Disperse
System



24V
Interface
(optional)



Wired Control
(optional)



Wi-Fi Control
(optional)



OTA
(optional)

FLOOR CONSOLE



Quieter Operation
Humidity Sensor
Dual Air Outlets With Larger Dimension

Better Air Quality
9,000 and 12,000 BTU capacities
Wired Controller *(optional)*

Features



ECO



Turbo



Sleep Mode



Timer



Follow Me



Self Clean



8°C Heating



LED



TU1 Copper



1%-100% Fan
Speed Setting



Breeze Away



Child Lock



°C and °F
Change



Silent Mode



Horizontal
Swing



Gear



A2L Disperse
System



24V
Interface
(optional)



Wired Control
(optional)



Wi-Fi Control
(optional)



OTA
(optional)

CEILING & FLOOR CONSOLE

Easy Maintenance

Fresh Air

3D Airflow

Capacities from 18,000 to 60,000 BTU

Two installation types: ceiling or floor

Wired Controller (*optional*)

Features



Sleep Mode



360° Airflow
Panel



Anti-cold
Air Function



2-way
Draining



Auto Restart
Function



Timer



TU1 Copper



A2L Disperse
System



24V
Interface
(*optional*)



Wired Control
(*optional*)




Wi-Fi Control
(*optional*)




OTA
(*optional*)

Single Zone

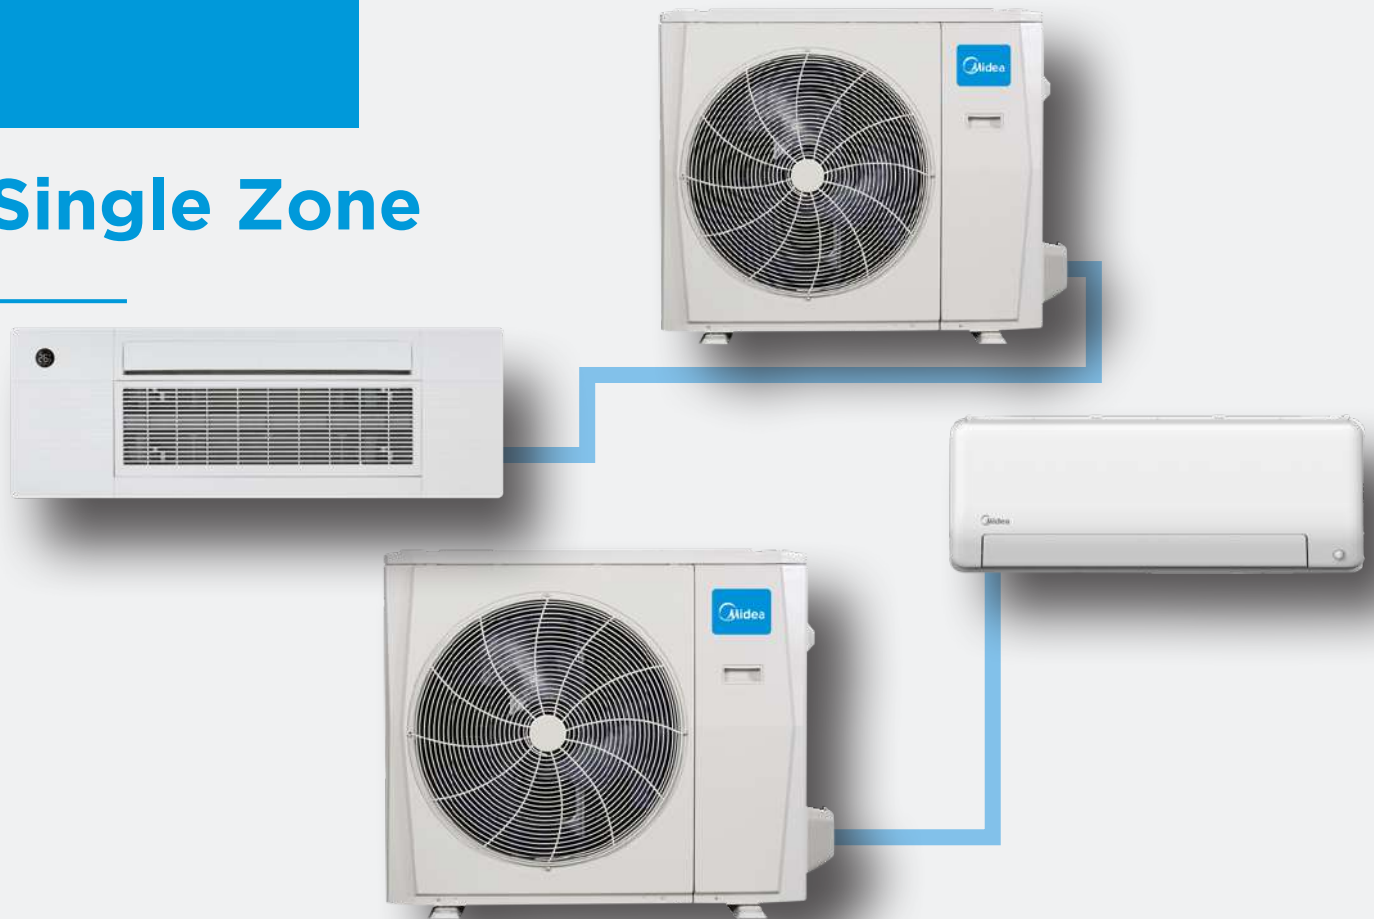

Multi-Zone

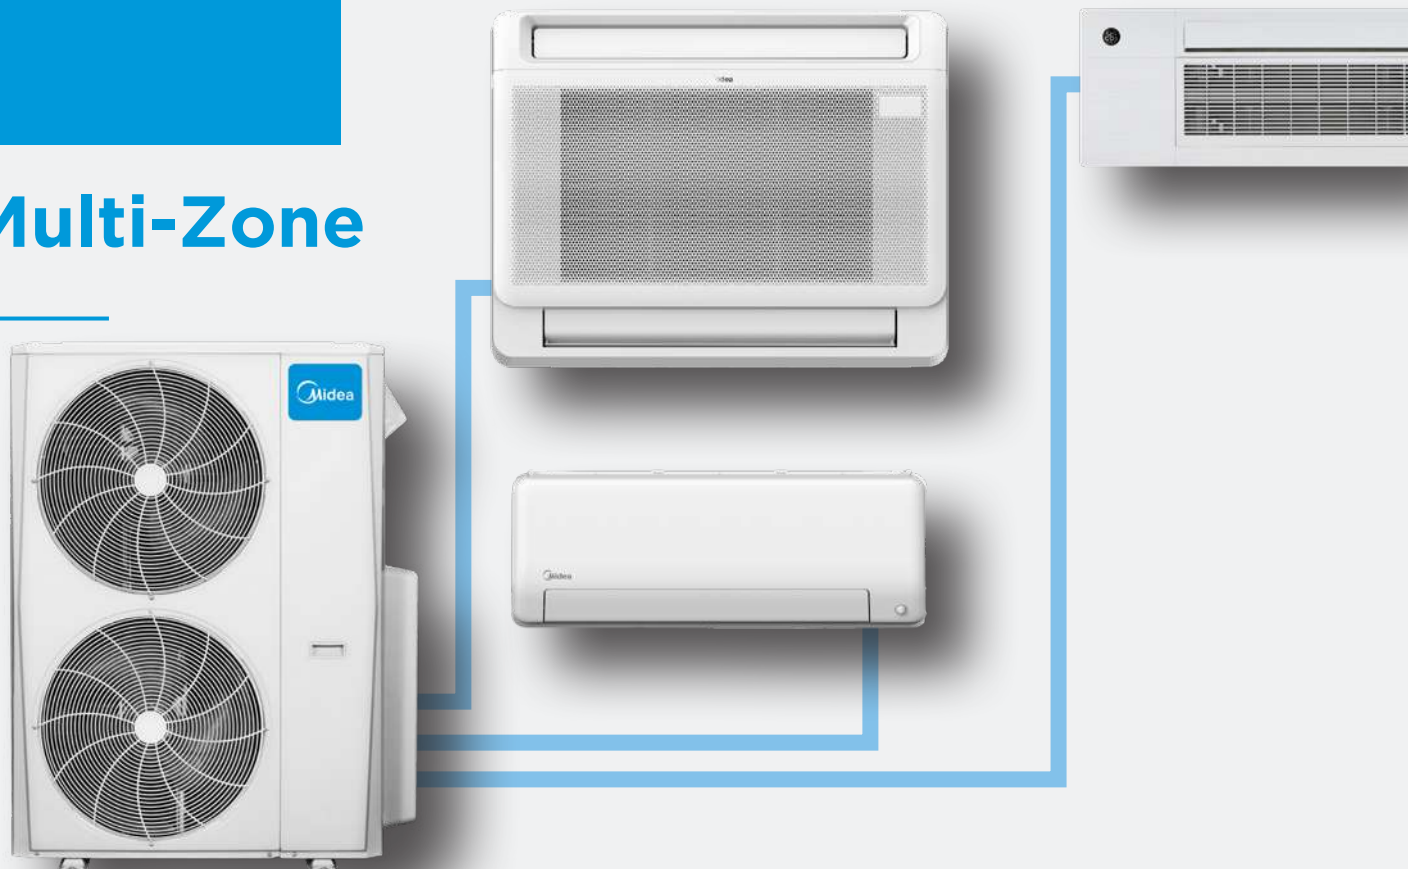

Extreme Heat MULTI-ZONE OUTDOOR UNIT



Cooling operation range | Heating operation range
-30°C ~ 50°C | -30°C ~ 24°C



48K BTU

18K BTU to 36K BTU

MODEL >>>	Outdoor Unit >>		MO3HX-H18B-2A	MO4HX-H27B-2A	MO5HX-H36B-2A	MO6HX-H48B-2A
	AHRI Ref. # (All Non-Ducted) >>		215471457	215471460	215471463	215471466
	AHRI Ref. # (All Ducted) >>		215471458	215471461	215471464	215471467
	AHRI Ref. # (Mix of Ducted and N.-Ducted) >>		215471459	215471462	215471465	215471468
	Zone >>		1 to 3 Zones	1 to 4 Zones	1 to 5 Zones	1 to 6 Zones
CERTIFICATION >						
						
						
EFFICIENCY >						
Capacity	Cooling	BTU/hr.	19,000 (5,400 - 28,000)	27,000 (7,200 - 37,000)	36,000 (9,000 - 43,000)	47,000 (12,000 - 57,000)
	Heating	BTU/hr.	20,000 (5,700 - 27,000)	27,000 (8,400 - 36,000)	36,000 (10,000 - 44,000)	49,000 (13,000 - 57,000)
SEER2		BTU/W	25	23	23	23
EER2		BTU/W	15.0	12.5	13.0	12.0
HSPF2 IV		BTU/W	10.4	10.5	10.7	11.0
HSPF2 V		BTU/W	8.5	8.5	8.5	9.0
Outdoor Operating Conditions	Cooling	°C	-30 - 50	-30 - 50	-30 - 50	-30 - 50
		°F	-22 - 122	-22 - 122	-22 - 122	-22 - 122
	Heating	°C	-30 - 24	-30 - 24	-30 - 24	-30 - 24
		°F	-22 - 75	-22 - 75	-22 - 75	-22 - 75
Heating at -15°C (5°F)	Rated capacity	BTU/W	19,000	27,000	36,000	47,000
	COP	W/W	2.0	2.0	2.0	2.0
ELECTRICAL DATA >						
Power Supply		V, Ph, Hz	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
Min. Circuit Ampacity		A	17.5	30	37	37
Max. Fuse		A	20	35	40	40
Fan Motor (RLA)		A	1.2	1.3	2.6	2.5
Compressor Rated Current (RLA)		A	9.2	17.0	20.5	27.0
FEATURES >						
Outdoor Airflow		CFM	2,130.7	2,148.4	3,037.2	4,502.8
Outdoor Noise Level		dB(A)	61.5	61.0	65.0	65.0
Refrigerant			R-454b	R-454b	R-454b	R-454b
Refrigerant charge		oz	78.31	120.63	134.04	151.68
Outdoor Additional Refrigerant per ft (6K to 18K)		oz/ft	0.16	0.16	0.16	0.16
Outdoor Additional Refrigerant per ft (24K and 33K)		oz/ft	0.32	0.32	0.32	0.32
Refrigerant Connectors*	Liquid	in	3 x 1/4	4 x 1/4	5 x 1/4	6 x 1/4
	Gas Side	in	3 x 3/8	3 x 3/8 + 1 x 1/2	3 x 3/8 + 2 x 1/2	4 x 3/8 + 2 x 1/2
Max. Refrigerant Pipe Lenght	Per indoor units	ft	98.4	114.8	114.8	114.8
	Total	ft	196.8	262.4	262.4	262.4
Max. Height Difference		ft	49.2	49.2	49.2	49.2
Connection Wiring			AWG 14-4	AWG 14-4	AWG 14-4	AWG 14-4
DIMENSIONS AND WEIGHT >						
Net Dimensions	W x D x H	in	37.24 x 16.14 x 31.89	37.24 x 16.14 x 31.89	38.58 x 16.34 x 38.39	37.48 x 16.34 x 52.48
Net Weight		lbs	137.35	168.43	211.86	246.47

*Piping diameter for each indoor unit: (6K to 12K = 1/4 and 3/8), (18K = 1/4 and 1/2), (24K = 3/8 and 5/8), (33K = 3/8 and 3/4)

MIDEA28 Wall-Mounted Split

SINGLE & MULTI-ZONE INDOOR UNIT



			MULTI-ZONE	SINGLE & MULTI-ZONE				
MODEL >>>	Indoor Unit >>		MSEHU-H06B-2A	MSEHU-H09B-2A	MSEHU-H12B-2A	MSEHU-H18B-2A	MSEHU-H24B-2A	MSEHU-H33B-2A
	Outdoor Unit >>		—	MO1HS-H09B-2A	MO1HS-H12B-2A	MO1HS-H18B-2A	MO1HS-H24B-2A	MO1HS-H33B-2A
	AHRI Ref. # >>		—	215471380	215471381	215471382	215471383	215471384
CERTIFICATION >								
			—					
 COLD CLIMATE V6.1			—					
EFFICIENCY >								
Capacity	Cooling	BTU/hr.	6,000 (2,300 - 12,600)	9,000 (3,800 - 13,500)	12,000 (3,800 - 14,600)	18,000 (8,800 - 19,400)	24,000 (12,600 - 27,900)	33,000 (15,000 - 37,000)
	Heating	BTU/hr.	7,000 (3,000 - 11,000)	12,000 (3,800 - 16,000)	12,000 (3,800 - 16,000)	18,000 (11,200 - 19,500)	29,000 (11,800 - 29,700)	36,000 (19,700 - 37,800)
SEER2		BTU/W	—	27.4	25.4	21.4	21.0	19.5
EER2		BTU/W	—	15.4	13.4	12.5	13.0	12.0
HSPF2 IV		BTU/W	—	12.5	10.5	11.0	13.5	10.5
HSPF2 V		BTU/W	—	9.5	8.0	8.5	9.8	8.6
Outdoor Operating Conditions	Cooling	°C	—	-30 - 50	-30 - 50	-30 - 50	-30 - 50	-30 - 50
		°F	—	-22 - 122	-22 - 122	-22 - 122	-22 - 122	-22 - 122
	Heating	°C	—	-30 - 24	-30 - 24	-30 - 24	-30 - 24	-30 - 24
		°F	—	-22 - 75	-22 - 75	-22 - 75	-22 - 75	-22 - 75
Heating at -15°C (5°F)	Rated capacity	BTU/W	—	11,500	11,500	18,000	24,200	35,000
	COP	W/W	—	1.80	1.80	1.92	2.34	1.98
INDOOR UNIT >								
ELECTRICAL DATA >								
Power Supply		V, Ph, Hz	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
FEATURES >								
Indoor Airflow	Turbo / Hi / Mi / Lo / Si	CFM	382.6 / 323.7 / 229.6 / 176.6 / 147.2	441.4 / 323.7 / 229.6 / 176.6 / 147.2	441.4 / 323.7 / 229.6 / 176.6 / 147.2	635.7 / 500.3 / 359.0 / 294.3 / <i>n/a</i>	812.3 / 618.0 / 412.0 / 317.8 / <i>n/a</i>	865.2 / 735.8 / 600.4 / 423.8 / <i>n/a</i>
Indoor Noise Level	Turbo / Hi / Mi / Lo / Si	dB(A)	44.0 / 36.5 / 32.5 / 22.0 / 19.5	<i>n/a</i> / 38 / 33 / 20.5 / 19.5	47 / 36.5 / 32.5 / 22 / 19.5	49.5 / 45.0 / 38.0 / 31.5 / 19.5	54.5 / 43.5 / 38.5 / 27 / 16	57.0 / 53.0 / 46.5 / 35.5 / 29.5
DIMENSIONS AND WEIGHT >								
Net Dimensions	W x D x H	in	31.30 x 8.86 x 11.61	31.30 x 8.86 x 11.61	31.30 x 8.86 x 11.61	37.99 x 9.41 x 12.56	44.88 x 10.83 x 14.57	44.88 x 10.83 x 14.57
Net Weight		lbs	22.93	23.37	22.93	27.34	43.65	43.21
OUTDOOR UNIT >								
ELECTRICAL DATA >								
Outdoor Min. Circuit Ampacity		A	—	15.0	15.0	19.0	24.9	34.0
Outdoor Max. Fuse		A	—	15	15	20	25	35
FEATURES >								
Outdoor Airflow		CFM	—	1,235.3	1,470.6	1,470.6	1,764.7	2,235.3
Outdoor Noise Level	Hi	dB(A)	—	56.0	56.0	59.0	61.5	63.5
Refrigerant			—	R-454b	R-454b	R-454b	R-454b	R-454b
Refrigerant charge		oz	—	35.27	35.27	55.38	63.49	87.13
Outdoor Additional Refrigerant per ft		oz/ft	—	0.16	0.16	0.16	0.32	0.32
Preloaded		ft	—	24.6	24.6	24.6	24.6	24.6
Refrigerant Piping	Liquid & Gas	in	1/4 & 3/8	1/4 & 3/8	1/4 & 3/8	1/4 & 1/2	3/8 & 5/8	3/8 & 3/4
	Max. Piping Length	ft	—	82.00	82.00	98.40	164.00	164.00
	Max. Height Diff.	ft	—	49.20	49.20	65.60	82.00	82.00
Connection Wiring			AWG 14-4	AWG 14-4	AWG 14-4	AWG 14-4	AWG 14-4	AWG 14-4
DIMENSIONS AND WEIGHT >								
Net Dimensions	W x D x H	in	—	31.69 x 12.99 x 21.81	31.69 x 12.99 x 21.81	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89	37.24 x 16.14 x 31.89
Net Weight		lbs	—	72.75	72.75	99.87	130.29	156.97

High Static Slim Duct

SINGLE & MULTI-ZONE INDOOR UNIT



			SINGLE & MULTI-ZONE			
MODEL >>>	Indoor Unit >>		MDHHU-H09B-2A	MDHHU-H12B-2A	MDHHU-H18B-2A	MDHHU-H24B-2A
	Outdoor Unit >>		MO1HS-H09B-2A	MO1HS-H12B-2A	MO1HS-H18B-2A	MO1HS-H24B-2A
	AHRI Ref. # >>		215471422	215471423	215471424	215471425
CERTIFICATION >						
			●	●	●	●
			●	●	●	●
EFFICIENCY >						
Capacity	Cooling	BTU/hr.	9,000 (3,000 - 13,100)	12,000 (3,000 - 13,300)	17,500 (4,000 - 20,600)	24,000 (5,000 - 28,000)
	Heating	BTU/hr.	9,900 (3,900 - 16,500)	12,000 (3,900 - 16,500)	19,500 (5,400 - 23,000)	26,000 (7,300 - 31,400)
SEER2		BTU/W	20.5	20.0	18.4	19.0
EER2		BTU/W	14.0	12.0	12.0	12.0
HSPF2 IV		BTU/W	13.8	10.6	11.1	11.7
HSPF2 V		BTU/W	10.8	8.5	9.0	9.3
Outdoor Operating Conditions	Cooling	°C	-30 - 50	-30 - 50	-30 - 50	-30 - 50
		°F	-22 - 122	-22 - 122	-22 - 122	-22 - 122
	Heating	°C	-30 - 24	-30 - 24	-30 - 24	-30 - 24
		°F	-22 - 75	-22 - 75	-22 - 75	-22 - 75
Heating at -15°C (5°F)	Rated capacity	BTU/W	11,900	12,000	18,000	24,000
	COP	W/W	1.85	1.95	2.10	2.18
INDOOR UNIT >						
ELECTRICAL DATA >						
Power Supply	V, Ph, Hz		208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
Min. Circuit Ampacity	A		3.00	3.00	3.00	3.00
Max. Fuse	A		15	15	15	15
FEATURES >						
Indoor Airflow	Turbo / Hi / Mi / Lo / Si	CFM	344.3 / 288.4 / 230.7 / 200.7 / 121.8	419.1 / 350.2 / 256.0 / 216.0 / 135.4	706.3 / 618.0 / 529.7 / 441.4 / n/a	853.5 / 706.3 / 618.0 / 500.3 / n/a
Indoor Noise Level	Hi / Mi / Lo / Si	dB(A)	29.5 / 28.5 / 27.5 / 26.0	32.5 / 30.5 / 28.5 / 26	36 / 34.0 / 32.0 / 28.0	40.0 / 37.0 / 35 / 29.5
Indoor Static Press. Range		in.w.g	0-0.8	0-0.8	0-0.8	0-0.8
DIMENSIONS AND WEIGHT >						
Net Dimensions	W x D x H	in	27.56 x 29.53 x 9.65	27.56 x 29.53 x 9.65	39.37 x 29.53 x 9.65	39.37 x 29.53 x 9.65
Net Weight		lbs	64.15	64.15	79.81	80.47
OUTDOOR UNIT >						
ELECTRICAL DATA >						
Outdoor Min. Circuit Ampacity	A		15.00	15.00	19.00	24.90
Outdoor Max. Fuse	A		15	15	20	25
FEATURES >						
Outdoor Airflow		CFM	1,471.5	1,471.5	1,765.8	2,236.7
Outdoor Noise Level	Hi	dB(A)	54.0	54.0	57.5	61.0
Refrigerant			R-454b	R-454b	R-454b	R-454b
Refrigerant charge	oz		35.27	35.27	55.38	63.49
Outdoor Additional Refrigerant per ft	oz/ft		0.16	0.16	0.16	0.32
Preloaded	ft		24.6	24.6	24.6	24.6
Refrigerant Piping	Liquid & Gas	in	1/4 & 3/8	1/4 & 3/8	1/4 & 1/2	3/8 & 5/8
	Max. Piping Length	ft	82.00	82.00	98.40	164.00
	Max. Height Diff.	ft	49.20	49.20	65.60	82.00
Connection Wiring			AWG 14-4	AWG 14-4	AWG 14-4	AWG 14-4
DIMENSIONS AND WEIGHT >						
Net Dimensions	W x D x H	in	31.69 x 12.99 x 21.81	31.69 x 12.99 x 21.81	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89
Net Weight		lbs	72.75	72.75	99.87	130.29

Low Static Slim Duct SINGLE & MULTI-ZONE INDOOR UNIT



SINGLE ZONE (LIGHT COMMERCIAL)			
	MDHHS-H36B-2A	MDHHS-H48B-2A	MDHHS-H60B-2A
	MO1HU-H36B-2A	MO1HU-H48B-2A	MO1HU-H60B-2A
	215471426	215471427	215471428
	●	●	●
	●	●	●
	36,000 (9,800 - 37,000)	48,000 (11,000 - 56,500)	55,000 (14,200 - 60,000)
	42,000 (11,000 - 45,500)	52,000 (11,200 - 60,000)	60,000 (11,200 - 66,000)
	17.7	16.7	15.8
	12.0	10.4	10.2
	11.1	10.8	10.4
	9.2	8.8	8.7
	-30 - 50	-30 - 50	-30 - 50
	-22 - 122	-22 - 122	-22 - 122
	-30 - 24	-30 - 24	-30 - 24
	-22 - 75	-22 - 75	-22 - 75
	37,600	47,500	53,500
	2.10	2.00	2.10
	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
	4.00	5.00	5.00
	15	15	15
	1,236.1 / 1,059.5 / 941.8 / 765.2 / n/a	1,648.1 / 1,471.5 / 1,294.9 / 1,059.5 / n/a	2,001.2 / 1,706.9 / 1,412.6 / 1,118.3 / n/a
	45 / 40 / 34 / 31	51 / 46 / 42 / 40	52 / 48 / 42 / 41
	0-0.8	0-0.8	0-0.8
	47.24 x 29.53 x 11.81	47.24 x 29.53 x 11.81	55.12 x 31.50 x 14.96
	106.26	111.33	161.38
	38.00	44.00	44.00
	40	45	45
	3,001.9	4,237.9	4,237.9
	65.0	65.0	63.0
	R-454b	R-454b	R-454b
	126.99	126.99	151.68
	0.32	0.32	0.32
	24.6	24.6	24.6
	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4
	246.00	246.00	246.00
	98.40	98.40	98.40
	2/18 Shielded	2/18 Shielded	2/18 Shielded
	38.58 x 16.34 x 38.39	37.48 x 16.34 x 52.48	37.48 x 16.34 x 52.48
	206.57	208.78	230.38

SINGLE & MULTI-ZONE			
	MDLHU-H09B-2A	MDLHU-H12B-2A	MDLHU-H18B-2A
	MO1HS-H09B-2A	MO1HS-H12B-2A	MO1HS-H18B-2A
	215471412	215471413	215471414
	●	●	●
	●	●	●
	9,000 (3,400 - 13,500)	12,000 (3,400 - 13,500)	17,000 (6,500 - 18,800)
	10,000 (3,800 - 16,200)	12,500 (3,800 - 16,200)	19,000 (8,900 - 22,000)
	21.4	20.0	18.0
	13.4	12.0	12.0
	12.5	10.0	10.5
	9.7	8.0	9.0
	-30 - 50	-30 - 50	-30 - 50
	-22 - 122	-22 - 122	-22 - 122
	-30 - 24	-30 - 24	-30 - 24
	-22 - 75	-22 - 75	-22 - 75
	11,200	11,800	18,000
	1.89	1.90	2.00
	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
	3.00	3.00	3.00
	15	15	15
	323.7 / 264.9 / 206.0 / 147.2 / 117.7	400.2 / 323.7 / 264.9 / 176.6 / 117.7	600.4 / 559.2 / 500.3 / 441.4 / n/a
	32.5 / 31 / 29.5 / 23	36 / 34.5 / 32.5 / 25.5	40 / 39 / 38 / 32
	0-0.4	0-0.4	0-0.4
	27.56 x 19.92 x 7.87	27.56 x 19.92 x 7.87	34.65 x 26.54 x 8.27
	39.46	39.46	54.45
	15.00	15.00	19.00
	15	15	20
	1,471.5	1,471.5	1,765.8
	56.0	56.0	59.0
	R-454b	R-454b	R-454b
	35.27	35.27	55.38
	0.16	0.16	0.16
	24.6	24.6	24.6
	1/4 & 3/8	1/4 & 3/8	1/4 & 1/2
	82.00	82.00	98.40
	32.80	32.80	65.60
	AWG 14-4	AWG 14-4	AWG 14-4
	31.69 x 12.99 x 21.81	31.69 x 12.99 x 21.81	35.04 x 13.46 x 26.50
	72.75	72.75	99.87

4-Way Cassette

SINGLE & MULTI-ZONE INDOOR UNIT



UP TO
22.6
SEER2

UP TO
12.3
HSPF2

HEATING
UP TO
-30°C

neep

COLD
CLIMATE V6.1
ENERGY STAR

A2L
R-454B

			SINGLE & MULTI-ZONE			
MODEL >>>	Indoor Unit >>		MCDHU-H09B-2A	MCDHU-H12B-2A	MCDHU-H18B-2A	MCDHU-H24B-2A
	Outdoor Unit >>		MO1HS-H09B-2A	MO1HS-H12B-2A	MO1HS-H18B-2A	MO1HS-H24B-2A
	AHRI Ref. # >>		215471395	215471396	215471397	215471398
CERTIFICATION >						
						
 COLD CLIMATE V6.1						
EFFICIENCY >						
Capacity	Cooling	BTU/hr.	9,000 (3,700 - 13,600)	12,000 (3,800 - 15,100)	16,000 (7,000 - 18,500)	23,400 (12,800 - 26,200)
	Heating	BTU/hr.	10,000 (5,100 - 15,700)	12,000 (5,300 - 16,200)	19,000 (8,700 - 20,000)	25,000 (11,500 - 30,700)
SEER2		BTU/W	22.6	22.2	20.0	20.7
EER2		BTU/W	14.0	12.5	12.5	12.0
HSPF2 IV		BTU/W	12.1	11.6	12.3	11.6
HSPF2 V		BTU/W	9.3	8.9	9.5	9.2
Outdoor Operating Conditions	Cooling	°C	-30 - 50	-30 - 50	-30 - 50	-30 - 50
		°F	-22 - 122	-22 - 122	-22 - 122	-22 - 122
	Heating	°C	-30 - 24	-30 - 24	-30 - 24	-30 - 24
		°F	-22 - 75	-22 - 75	-22 - 75	-22 - 75
Heating at -15°C (5°F)	Rated capacity	BTU/W	11,000	11,500	17,000	23,800
	COP	W/W	1.84	2.00	1.90	2.23
INDOOR UNIT >						
ELECTRICAL DATA >						
Power Supply		V, Ph, Hz	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
Min. Circuit Ampacity		A	3.00	3.00	3.00	3.00
Max. Fuse		A	15	15	15	15
FEATURES >						
Indoor Airflow	Turbo / Hi / Mi / Lo / Si	CFM	353.2 / 312.0 / 264.9 / 182.5 / 147.2	417.9 / 364.9 / 306.1 / 194.2 / 147.2	447.3 / 388.5 / 317.8 / 194.2 / 147.2	765.2 / 706.3 / 635.7 / 547.4 / n/a
Indoor Noise Level	Turbo / Hi / Mi / Lo / Si	dB(A)	42.5 / 40.0 / 37.5 / 26.0 / 24.0	46 / 43.5 / 40.5 / 27.5 / 26.00	48 / 44.5 / 41.0 / 27.5 / 23.5	48.5 / 45.0 / 42.5 / 33.5 / n/a
DIMENSIONS AND WEIGHT >						
Net Dimensions	W x D x H	in	22.44 x 22.44 x 9.65	22.44 x 22.44 x 9.65	22.44 x 22.44 x 9.65	32.68 x 32.68 x 8.07
Net Weight		lbs	35.27	35.27	35.27	47.18
OUTDOOR UNIT >						
ELECTRICAL DATA >						
Outdoor Min. Circuit Ampacity		A	15.00	15.00	19.00	24.90
Outdoor Max. Fuse		A	15	15	20	25
FEATURES >						
Outdoor Airflow		CFM	1,471.5	1,471.5	1,765.8	2,236.7
Outdoor Noise Level	Hi	dB(A)	55.0	57.0	57.5	61.5
Refrigerant			R-454b	R-454b	R-454b	R-454b
Refrigerant charge		oz	35.27	35.27	55.38	63.49
Outdoor Additional Refrigerant per ft		oz/ft	0.16	0.16	0.16	0.32
Preloaded		ft	24.6	24.6	24.6	24.6
Refrigerant Piping	Liquid & Gas	in	1/4 & 3/8	1/4 & 3/8	1/4 & 1/2	3/8 & 5/8
	Max. Piping Length	ft	82.00	82.00	98.40	164.00
	Max. Height Diff.	ft	49.20	49.20	65.60	82.00
Connection Wiring			AWG 14-4	AWG 14-4	AWG 14-4	AWG 14-4
DIMENSIONS AND WEIGHT >						
Net Dimensions	W x D x H	in	31.69 x 12.99 x 21.81	31.69 x 12.99 x 21.81	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89
Net Weight		lbs	72.75	72.75	99.87	130.29

One-Way Cassette

SINGLE & MULTI-ZONE INDOOR UNIT



SINGLE ZONE (LIGHT COMMERCIAL)		
	MCDHS-H36B-2A	MCDHS-H48B-2A
	MO1HU-H36B-2A	MO1HU-H48B-2A
	215471399	215471400
	●	●
	●	●
	36,600 (4,900 - 38,000)	48,000 (4,900 - 52,700)
	37,000 (11,400 - 44,600)	53,000 (19,000 - 57,400)
	21.2	18.0
	12.0	10.0
	10.6	11.0
	8.8	8.8
	-30 - 50	-30 - 50
	-22 - 122	-22 - 122
	-30 - 24	-30 - 24
	-22 - 75	-22 - 75
	37,000	47,500
	1.95	1.96
	208 / 230, 1, 60	208 / 230, 1, 60
	3.00	3.00
	15	15
	1,041.8 / 947.6 / 853.5 / 753.4 / 659.2	1,236.1 / 1,124.2 / 1,018.3 / 800.5 / 688.7
	n/a / 52.0 / 47.5 / 40.0 / 38.00	n/a / 52.0 / 49.5 / 41.5 / 38.00
	32.68 x 32.68 x 9.65	32.68 x 32.68 x 11.30
	59.30	64.59
	38.00	44.00
	40	45
	3,001.9	4,237.9
	64.5	62.5
	R-454b	R-454b
	126.99	126.99
	0.32	0.32
	24.6	24.6
	3/8 & 3/4	3/8 & 3/4
	246.00	246.00
	98.40	98.40
	2/18 Shielded	2/18 Shielded
	38.58 x 16.34 x 38.39	37.48 x 16.34 x 52.48
	206.57	208.78

SINGLE & MULTI-ZONE		
MCAHU-H09B-2A	MCAHU-H12B-2A	MCAHU-H18B-2A
MO1HS-H09B-2A	MO1HS-H12B-2A	MO1HS-H18B-2A
215471405	215471406	215471407
●	●	●
●	●	●
9,000 (4,000 - 12,900)	12,000 (4,000 - 13,900)	16,700 (5,700 - 19,000)
10,900 (3,800 - 13,900)	12,500 (4,600 - 15,200)	20,000 (8,900 - 22,000)
24.0	23.0	20.6
14.6	13.0	12.5
12.1	10.0	12.2
9.5	8.0	9.2
-30 - 50	-30 - 50	-30 - 50
-22 - 122	-22 - 122	-22 - 122
-30 - 24	-30 - 24	-30 - 24
-22 - 75	-22 - 75	-22 - 75
10,600	11,500	17,500
1.83	2.00	1.89
208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
3.00	3.00	3.00
15	15	15
341.4 / 294.3 / 259.0 / 235.4 / <i>n/a</i>	353.2 / 312.0 / 282.5 / 247.2 / 176.6	400.2 / 352.0 / 300.2 / 207.2 / <i>n/a</i>
<i>n/a</i> / 38 / 36 / 33 / 24	<i>n/a</i> / 41 / 37 / 33 / 24	<i>n/a</i> / 44 / 41.5 / 31 / 26
50.31 x 13.19 x 8.98	50.31 x 13.19 x 8.98	50.31 x 13.19 x 8.98
45.19	45.19	45.19
15.00	15.00	19.00
15	15	20
1,471.5	1,471.5	1,765.8
54.5	56.0	59.0
R-454b	R-454b	R-454b
35.27	35.27	55.38
0.16	0.16	0.16
24.6	24.6	24.6
1/4 & 3/8	1/4 & 3/8	1/4 & 1/2
82.02	82.02	98.43
49.21	49.21	65.62
AWG 14-4	AWG 14-4	AWG 14-4
31.69 x 12.99 x 21.81	31.69 x 12.99 x 21.81	35.04 x 13.46 x 26.50
72.75	72.75	99.87

Floor Console and Ceiling & Floor Console

SINGLE & MULTI-ZONE INDOOR UNIT

UP TO
27.2
SEER2

UP TO
12.1
HSPF2

HEATING
UP TO
-30°C

ne
ep

COLD
CLIMATE V6.1
ENERGY STAR

A2L
R-454B



Floor
Console



Ceiling & Floor
Console

			 Floor Console		 Ceiling & Floor Console	
SINGLE & MULTI-ZONE						
MODEL >>>	Indoor Unit >>		MFAHU-H09B-2A	MFAHU-H12B-2A	MFBHU-H18B-2A	MFBHU-H24B-2A
	Outdoor Unit >>		MO1HS-H09B-2A	MO1HS-H12B-2A	MO1HS-H18B-2A	MO1HS-H24B-2A
	AHRI Ref. # >>		215471432	215471433	215471440	215471441
CERTIFICATION >						
						
 COLD CLIMATE V6.1						
EFFICIENCY >						
Capacity	Cooling	BTU/hr.	9,000 (3,700 - 13,700)	12,000 (3,700 - 14,000)	17,000 (7,400 - 19,200)	22,000 (12,700 - 25,600)
	Heating	BTU/hr.	9,000 (4,400 - 16,100)	12,000 (4,400 - 16,100)	19,000 (8,300 - 20,700)	26,000 (11,300 - 29,500)
SEER2		BTU/W	27.2	25.0	20.4	20.4
EER2		BTU/W	15.1	12.5	12.5	12.0
HSPF2 IV		BTU/W	10.9	10.5	10.3	12.1
HSPF2 V		BTU/W	8.9	8.3	8.2	9.8
Outdoor Operating Conditions	Cooling	°C	-30 - 50	-30 - 50	-30 - 50	-30 - 50
		°F	-22 - 122	-22 - 122	-22 - 122	-22 - 122
	Heating	°C	-30 - 24	-30 - 24	-30 - 24	-30 - 24
		°F	-22 - 75	-22 - 75	-22 - 75	-22 - 75
Heating at -15°C (5°F)	Rated capacity	BTU/W	11,300	11,300	17,000	24,200
	COP	W/W	1.84	1.88	1.86	2.16
INDOOR UNIT >						
ELECTRICAL DATA >						
Power Supply		V, Ph, Hz	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
Min. Circuit Ampacity		A	3.00	3.00	1.90	2.50
Max. Fuse		A	15	15	15	15
FEATURES >						
Indoor Airflow	Turbo / Hi / Mi / Lo / Si	CFM	441.4 / 376.7 / 323.7 / 188.4 / 129.5	441.4 / 376.7 / 323.7 / 188.4 / 129.5	576.8 / 547.4 / 485.6 / 420.8 / n/a	735.8 / 706.3 / 606.3 / 453.2 / 376.7
Indoor Noise Level	Hi / Mi / Lo / Si	dB(A)	45 / 41.0 / 37.5 / 25.5 / 22.00	44 / 40.5 / 37.0 / 26.5 / 24.00	45 / 42.5 / 39.5 / 30.5 / 29.0	51.5 / 49.0 / 45.0 / 34.0 / 29.0
DIMENSIONS AND WEIGHT >						
Net Dimensions	W x D x H	in	31.26 x 7.87 x 24.45	31.26 x 7.87 x 24.45	42.05 x 26.57 x 9.25	42.05 x 26.57 x 9.25
Net Weight		lbs	32.85	32.85	58.42	61.29
OUTDOOR UNIT >						
ELECTRICAL DATA >						
Outdoor Min. Circuit Ampacity		A	15.00	15.00	19.00	24.90
Outdoor Max. Fuse		A	15	15	20	25
FEATURES >						
Outdoor Airflow		CFM	1,471.5	1,471.5	1,765.8	2,236.7
Outdoor Noise Level	Hi	dB(A)	55.5	55.5	58.0	61.5
Refrigerant			R-454b	R-454b	R-454b	R-454b
Refrigerant charge		oz	35.27	35.27	55.38	63.49
Outdoor Additional Refrigerant per ft		oz/ft	0.16	0.16	0.16	0.32
Preloaded		ft	24.6	24.6	24.6	24.6
Refrigerant Piping	Liquid & Gas	in	1/4 & 3/8	1/4 & 1/2	1/4 & 1/2	3/8 & 5/8
	Max. Piping Length	ft	82.00	82.00	98.40	164.00
	Max. Height Diff.	ft	49.20	49.20	65.60	82.00
Connection Wiring			AWG 14-4	AWG 14-4	AWG 14-4	AWG 14-4
DIMENSIONS AND WEIGHT >						
Net Dimensions	W x D x H	in	31.69 x 12.99 x 21.81	31.69 x 12.99 x 21.81	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89
Net Weight		lbs	72.75	72.75	99.87	130.29

Ceiling & Floor Console

SINGLE & MULTI-ZONE INDOOR UNIT



			SINGLE ZONE (LIGHT COMMERCIAL)		
MODEL >>>	Indoor Unit >>		MFBHS-H36B-2A	MFBHS-H48B-2A	MFBHS-H60B-2A
	Outdoor Unit >>		MO1HU-H36B-2A	MO1HU-H48B-2A	MO1HU-H60B-2A
	AHRI Ref. # >>		215471442	215471443	215471444
CERTIFICATION >					
					
					
EFFICIENCY >					
Capacity	Cooling	BTU/hr.	36,400 (6,100 - 38,300)	48,000 (6,700 - 53,500)	54,000 (20,000 - 54,500)
	Heating	BTU/hr.	38,000 (11,100 - 45,400)	52,000 (18,800 - 58,700)	60,000 (21,700 - 65,500)
SEER2		BTU/W	20.0	18.5	18.0
EER2		BTU/W	12.0	9.4	9.0
HSPF2 IV		BTU/W	10.8	10.1	10.7
HSPF2 V		BTU/W	8.9	8.0	8.5
Outdoor Operating Conditions	Cooling	°C	-30 - 50	-30 - 50	-30 - 50
		°F	-22 - 122	-22 - 122	-22 - 122
	Heating	°C	-30 - 24	-30 - 24	-30 - 24
		°F	-22 - 75	-22 - 75	-22 - 75
Heating at -15°C (5°F)	Rated capacity	BTU/W	39,500	47,000	54,000
	COP	W/W	2.02	1.83	1.91
INDOOR UNIT >					
ELECTRICAL DATA >					
Power Supply		V, Ph, Hz	208 / 230, 1, 60	208 / 230, 1, 60	208 / 230, 1, 60
Min. Circuit Ampacity		A	3.00	3.00	3.00
Max. Fuse		A	15	15	15
FEATURES >					
Indoor Airflow	Turbo / Hi / Mi / Lo / Si	CFM	1,224.3 / 1,088.9 / 988.8 / 765.2 / 653.3	1,353.8 / 1,236.1 / 1,083.0 / 800.5 / 665.1	1,365.6 / 1,236.1 / 1,118.3 / 882.9 / 777.0
Indoor Noise Level	Hi / Mi / Lo / Si	dB(A)	n/a / 51.0 / 45.5 / 39.0 / 35.0	54 / 53.0 / 48.5 / 39 / 35	n/a / 54.5 / 49.0 / 42.0 / 39.0
DIMENSIONS AND WEIGHT >					
Net Dimensions	W x D x H	in	64.96 x 26.57 x 9.25	64.96 x 26.57 x 9.25	64.96 x 26.57 x 9.25
Net Weight		lbs	88.85	89.07	95.24
OUTDOOR UNIT >					
ELECTRICAL DATA >					
Outdoor Min. Circuit Ampacity		A	38.00	44.00	44.00
Outdoor Max. Fuse		A	40	45	45
FEATURES >					
Outdoor Airflow		CFM	3,001.9	4,237.9	4,237.9
Outdoor Noise Level	Hi	dB(A)	65.0	64.5	64.5
Refrigerant			R-454b	R-454b	R-454b
Refrigerant charge		oz	126.99	126.99	151.68
Outdoor Additional Refrigerant per ft		oz/ft	0.32	0.32	0.32
Preloaded		ft	24.6	24.6	24.6
Refrigerant Piping	Liquid & Gas	in	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4
	Max. Piping Length	ft	246.00	246.00	246.00
	Max. Height Diff.	ft	98.40	98.40	98.40
Connection Wiring			2/18 Shielded	2/18 Shielded	2/18 Shielded
DIMENSIONS AND WEIGHT >					
Net Dimensions	W x D x H	in	38.58 x 16.34 x 38.39	37.48 x 16.34 x 52.48	37.48 x 16.34 x 52.48
Net Weight		lbs	206.57	208.78	230.38

Extreme Heat MULTI-INDOOR UNITS COMBINATION RULE

Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination (Only Run)										
			1 Unit	2 Units	3 Units	4 Units	5 Units	6 Units					
Hyper 1 Drive 3	MO3HX-H18B-2A	Wall mounted (MIDEA28): 6K/9K/12K/18K/24K Cassette/Duct/Console: 6K/9K/12K/18K/24K	MIDEA28/Duct: 6+6+6	18	6+6	6+6+6							
				24	6+9	6+6+9							
					6+12	6+6+12							
					6+18	6+6+18							
					6+24	6+6+24							
					9+9	6+9+9							
					9+12	6+9+12							
					9+18	6+9+18							
					9+24	6+12+12							
					12+12	6+12+18							
					12+18	9+9+9							
					12+24	9+9+12							
					18+18	9+9+18							
						9+12+12							
						12+12+12							
Hyper 1 Drive 4	MO4HX-H27B-2A	Wall mounted (MIDEA28): 6K/9K/12K/18K/24K/30 Cassette/Duct/Console: 6K/9K/12K/18K/24K	MIDEA28/Duct: 6+6+6+9	24	6+18	6+6+6	6+6+6+6						
				30	6+24	6+6+9	6+6+6+9						
					9+9	6+6+12	6+6+6+12						
					9+12	6+6+18	6+6+6+18						
					9+18	6+6+24	6+6+6+24						
					9+24	6+9+9	6+6+9+9						
					12+12	6+9+12	6+6+9+12						
					12+18	6+9+18	6+6+9+18						
					12+24	6+9+24	6+6+9+24						
					18+18	6+12+12	6+6+12+12						
						6+12+18	6+6+12+18						
						6+12+24	6+6+12+24						
						6+18+18	6+6+18+18						
						6+18+24	6+9+9+9						
						9+9+9	6+9+9+12						
						9+9+12	6+9+9+18						
						9+9+18	6+9+9+24						
						9+9+24	6+9+12+12						
						9+12+12	6+9+12+18						
						9+12+18	6+12+12+12						
						9+12+24	6+12+12+18						
						9+18+18	9+9+9+9						
						12+12+12	9+9+9+12						
						12+12+18	9+9+9+18						
						12+12+24	9+9+12+12						
						12+18+18	9+9+12+18						
							9+12+12+12						
							12+12+12+12						
				Hyper 1 Drive 5	MO5HX-H36B-2A	Wall mounted (MIDEA28): 6K/9K/12K/18K/24K/30K/36K Cassette/Duct/Console: 6K/9K/12K/18K/24K	MIDEA28/Duct: 6+6+6+9+9	30	6+24	6+6+12	6+6+6+6	6+6+6+6+6	
								36	6+30	6+6+18	6+6+6+9	6+6+6+6+9	
	6+36	6+6+24	6+6+6+12					6+6+6+6+12					
	9+18	6+6+30	6+6+6+18					6+6+6+6+18					
	9+24	6+6+36	6+6+6+24					6+6+6+6+24					
	9+30	6+9+9	6+6+9+9					6+6+6+9+12					
	9+36	6+9+12	6+6+9+12					6+6+6+9+18					
	12+12	6+9+18	6+6+9+18					6+6+6+12+12					
	12+18	6+9+24	6+6+9+24					6+6+6+12+18					
	12+24	6+9+30	6+6+12+12					6+6+9+9+9					
	12+30	6+12+12	6+6+12+18					6+6+9+9+12					
	12+36	6+12+18	6+6+12+24					6+6+9+9+18					
	18+18	6+12+24	6+6+18+18					6+6+9+12+12					
	18+24	6+12+30	6+6+18+24					6+6+12+12+12					
	18+30	6+18+18	6+9+9+9					6+9+9+9+9					
	24+24	6+18+24	6+9+9+12					6+9+9+9+12					
		9+9+9	6+9+9+18					6+9+9+12+12					
		9+9+12	6+9+9+24					9+9+9+9+9					
		9+9+18	6+9+12+12					9+9+9+9+12					
		9+9+24	6+9+12+18										

Extreme Heat MULTI-INDOOR UNITS COMBINATION RULE


Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination (Only Run)					
			1 Unit	2 Units	3 Units	4 Units	5 Units	6 Units
Hyper 1 Drive 5	MO5HX-H36B-2A	Wall mounted (MIDEA28): 6K/9K/12K/18K/24K/30K/36K Cassette/Duct/Console: 6K/9K/12K/18K/24K			9+9+30	6+9+12+24		
					9+12+12	6+9+18+18		
					9+12+18	6+9+18+24		
					9+12+24	6+12+12+12		
					9+18+18	6+12+12+18		
					9+18+24	6+12+12+24		
					12+12+12	6+12+18+18		
					12+12+18	6+12+18+24		
					12+12+24	6+18+18+18		
					12+18+18	9+9+9+9		
					12+18+24	9+9+9+12		
					18+18+18	9+9+9+18		
						9+9+9+24		
						9+9+12+12		
						9+9+12+18		
						9+9+12+24		
						9+9+18+18		
						9+9+18+24		
						9+12+12+12		
						9+12+12+18		
						9+12+12+24		
						9+12+18+18		
						9+18+18+18		
						12+12+12+12		
						12+12+12+18		
						12+12+12+24		
						12+12+18+18		
Hyper 1 Drive 6	MO6HX-H48B-2A	Wall mounted (MIDEA28): 6K/9K/12K/18K/24K/30K/36K Cassette/Duct/Console: 6K/9K/12K/18K/24K	30	6+24	6+6+18	6+6+6+6	6+6+6+6+6	6+6+6+6+6+6
			36	6+30	6+6+24	6+6+6+9	6+6+6+6+9	6+6+6+6+6+9
				6+36	6+6+30	6+6+6+12	6+6+6+6+12	6+6+6+6+6+12
				9+18	6+6+36	6+6+6+18	6+6+6+6+18	6+6+6+6+6+18
				9+24	6+9+9	6+6+6+24	6+6+6+6+24	6+6+6+6+6+24
				9+30	6+9+12	6+6+9+9	6+6+6+9+9	6+6+6+6+9+9
				9+36	6+9+18	6+6+9+12	6+6+6+9+12	6+6+6+6+9+12
				12+12	6+9+24	6+6+9+18	6+6+6+9+18	6+6+6+6+9+18
				12+18	6+9+30	6+6+9+24	6+6+6+9+24	6+6+6+6+9+24
				12+24	6+9+36	6+6+12+12	6+6+6+12+12	6+6+6+6+12+12
				12+30	6+12+12	6+6+12+18	6+6+6+12+18	6+6+6+6+12+18
				12+36	6+12+18	6+6+12+24	6+6+6+12+24	6+6+6+6+12+24
				18+18	6+12+24	6+6+18+18	6+6+6+18+18	6+6+6+9+9+9
				18+24	6+12+30	6+6+18+24	6+6+6+18+24	6+6+6+9+9+12
				18+30	6+12+36	6+9+9+9	6+6+9+9+9	6+6+6+9+9+18
				18+36	6+18+18	6+9+9+12	6+6+9+9+12	6+6+6+9+9+24
				24+24	6+18+24	6+9+9+18	6+6+9+9+18	6+6+6+9+12+12
				24+30	6+18+30	6+9+9+24	6+6+9+9+24	6+6+6+9+12+18
				24+36	6+18+36	6+9+12+12	6+6+9+12+12	6+6+6+9+12+24
					9+9+9	6+9+12+18	6+6+9+12+18	6+6+6+12+12+12
					9+9+12	6+9+12+24	6+6+9+12+24	6+6+6+12+12+18
					9+9+18	6+9+18+18	6+6+9+18+18	6+6+6+12+12+24
					9+9+24	6+9+18+24	6+6+9+18+24	6+6+9+9+9+9
					9+9+30	6+12+12+12	6+6+12+12+12	6+6+9+9+9+12
					9+9+36	6+12+12+18	6+6+12+12+18	6+6+9+9+9+18
					9+12+12	6+12+12+24	6+6+12+12+24	6+6+9+9+9+24
					9+12+18	6+12+18+18	6+6+12+18+18	6+6+9+9+12+12
					9+12+24	6+12+18+24	6+6+12+18+24	6+6+9+9+12+18
					9+12+30	6+18+18+18	6+6+18+18+18	6+6+9+9+12+24
					9+12+36	6+18+18+24	6+6+18+18+24	6+6+9+12+12+12
					9+18+18	9+9+9+9	6+9+9+9+9	6+6+9+12+12+18
					9+18+24	9+9+9+12	6+9+9+9+12	6+6+9+12+12+24
					9+18+30	9+9+9+18	6+9+9+9+18	6+6+12+12+12+12
					9+18+36	9+9+9+24	6+9+9+9+24	6+6+12+12+12+18
					12+12+12	9+9+12+12	6+9+9+12+12	6+6+12+12+12+24
					12+12+18	9+9+12+18	6+9+9+12+18	6+9+9+9+9+9

Extreme Heat MULTI-INDOOR UNITS COMBINATION RULE

Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination (Only Run)					
			1 Unit	2 Units	3 Units	4 Units	5 Units	6 Units
Hyper 1 Drive 6	MO6HX-H48B-2A	Wall mounted (MIDEA28): 6K/9K/12K/18K/24K/30K/36K Cassette/Duct/Console: 6K/9K/12K/18K/24K			12+12+24	9+9+12+24	6+9+9+12+24	6+9+9+9+9+12
					12+12+30	9+9+18+18	6+9+9+18+18	6+9+9+9+9+18
					12+12+36	9+9+18+24	6+9+9+18+24	6+9+9+9+9+24
					12+18+18	9+12+12+12	6+9+12+12+12	6+9+9+9+12+12
					12+18+24	9+12+12+18	6+9+12+12+18	6+9+9+9+12+18
					12+18+30	9+12+12+24	6+9+12+12+24	6+9+9+9+12+24
					12+18+36	9+12+18+18	6+9+12+18+18	6+9+9+12+12+12
					18+18+18	9+12+18+24	6+9+12+18+24	6+9+9+12+12+18
						9+18+18+18	6+9+18+18+18	6+9+9+12+12+24
						12+12+12+12	6+12+12+12+12	6+9+12+12+12+12
						12+12+12+18	6+12+12+12+18	6+9+12+12+12+18
						12+12+12+24	6+12+12+12+24	6+12+12+12+12+12
						12+12+18+18	6+12+12+18+18	6+12+12+12+12+18
						12+12+18+24	6+12+18+18+18	9+9+9+9+9+9
						12+18+18+18	9+9+9+9+9	9+9+9+9+9+12
							9+9+9+9+12	9+9+9+9+9+18
							9+9+9+9+18	9+9+9+9+9+24
							9+9+9+9+24	9+9+9+9+12+12
							9+9+9+12+12	9+9+9+9+12+18
							9+9+9+12+18	9+9+9+9+12+24
							9+9+9+12+24	9+9+9+12+12+12
							9+9+9+18+18	9+9+9+12+12+18
							9+9+9+18+24	9+9+12+12+12+12
							9+9+12+12+12	9+9+12+12+12+18
							9+9+12+12+18	9+12+12+12+12+12
							9+9+12+12+24	12+12+12+12+12+12
							9+9+12+18+18	
							9+9+12+18+24	
							9+9+18+18+18	
							9+12+12+12+12	
							9+12+12+12+18	
							9+12+12+12+24	
							9+12+12+18+18	
							12+12+12+12+12	
							12+12+12+12+18	
							12+12+12+12+24	
							12+12+12+18+18	

1. If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.
2. If the size of the indoor units are the same, the combinations of small indoor units can be applied to same size units. For example, the size of 9K and 12K MIDEA28 are the same, so the 12K unit can be considered as 9K and applied to the combinations of 9K units.
3. For most efficient 12K MIDEA28, it should be considerde as 18K unit in the combination chart because it has the same size with regular 18K MIDEA28.
4. For One-way Cassette series, it should be considered as 18K unit in combination chart because the 6K/9K/12K/18K sizes are the same.

Remote Controller

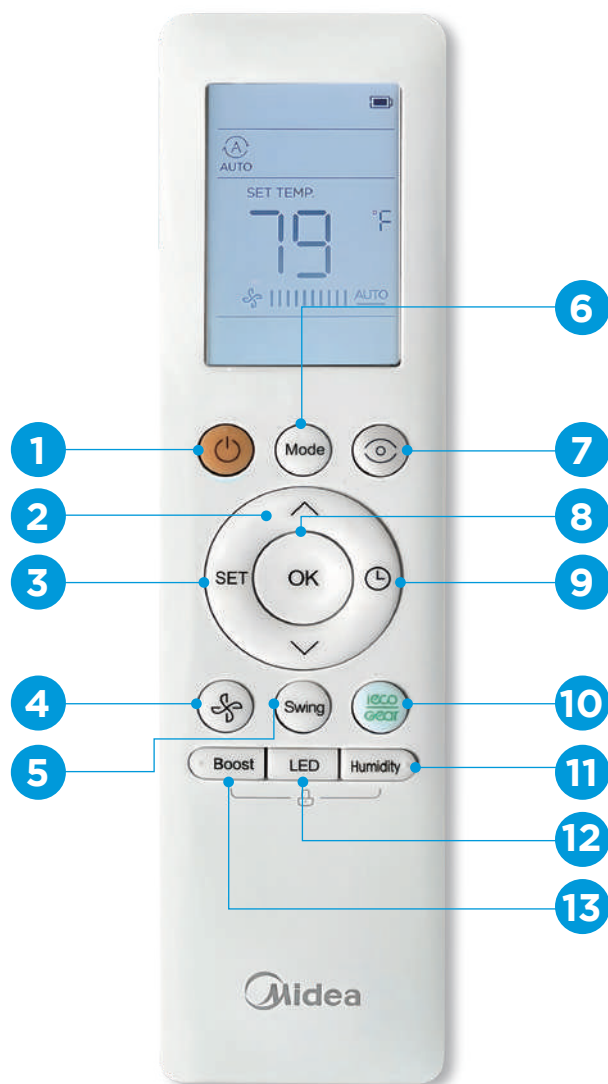

- 1 ON/OFF**
Turns the unit on or off
- 2 TEMP**
Temperature setting
- 3 SET**
Scrolls through operation functions:
Fresh/Sleep/Follow Me/AP Mode
- 4 FAN SPEED**
Select fan speeds:
AUTO/20%/40%/60%/80%/100%
- 5 SWING**
Starts and stop the horizontal louver
movement
- 6 MODE**
Scrolls through operation modes:
AUTO/COOL/DRY/HEAT/FAN
- 7 ECO INTELLIGENT EYE**
Used to detect the people activities
in the room to save energy
- 8 OK**
Confirm the selected functions
- 9 TIMER**
Set timer to turn unit on or off
- 10 ECO/GEAR**
Scrolls through energy efficient modes:
ECO/GEAR (75%)/GEAR (50%)
- 11 HUMIDITY**
Humidity setting
- 12 LED**
Turns LED display and air conditioner
buzzer on and off
- 13 BOOST**
Reaches preset temperature in the shortest
possible time

One of the best warranty programs in the industry

We guarantee long-lasting units because we use top-quality materials. Since our heat pumps are built to last, we can offer one of the best warranty programs in the industry.

In addition, **Midea** focuses on optimizing both its operations and its product design in order to minimize harmful effects on the environment, thanks to a strong investment in R&D.

RESIDENTIAL WARRANTY



COMMERCIAL WARRANTY



make yourself at home

mideaheatpumps.ca

Exclusive distributor in Quebec



CANADA 2024

YOUR RETAILER

